


INTERNET


CATV-Management

Steuerung RW-Schalter / schaltbare TAB's, Verstärker

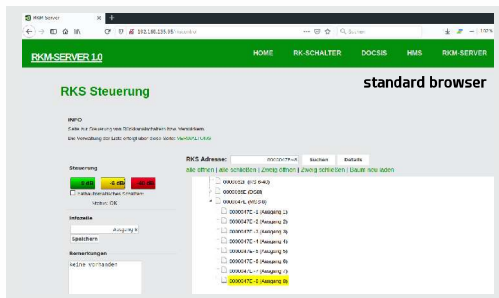

Rückweg-Monitoring

Return Path Spectrum-Analyzer

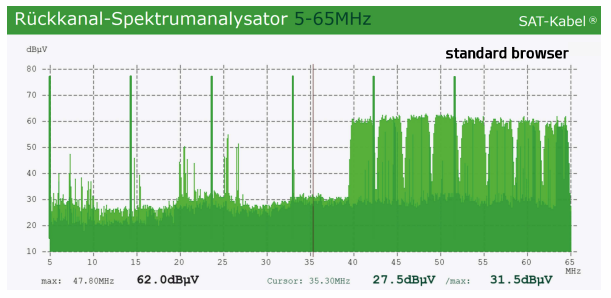


HEADEND

CMTS


IP

IP


IP

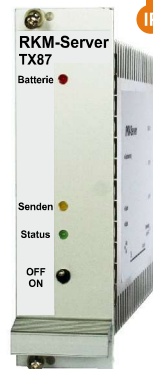

Ingress Switch




DOWNSTREAM
TX 87,3 MHz

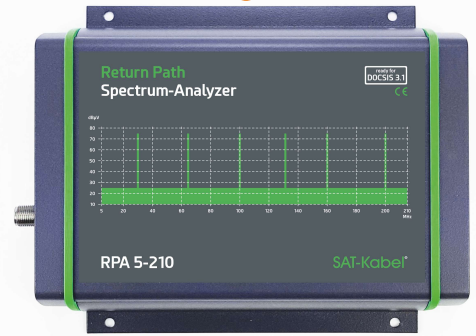

UPSTREAM
5-65 MHz

CATV-NETWORK

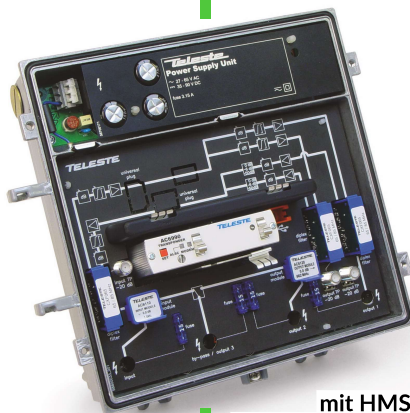

Linien-Verstärker
mit HMS / Docsis Steuerung
line amplifier with HMS / Docsis control

Return Path adjustment

RFG 6 Signal Generator

6 switchable fixed frequencies,
which can be displayed graphically
with the RPA 5-210 Analyzer.
The system is applied to adjust gain /
slope on return path amplifiers and
monitor the return path range of the
CATV-Clusters.

RFG 6

5-65 MHz
5-85 MHz
5-204 MHz



mobil with accu
send 110 dB(μV)
10-60 MHz
in UPSTREAM




schaltbare RK-Verstärker modular
switchable return path amplifier modular



Universal-Rückweg-Schalter
universal return path switch



schaltbare Dosen
switchable Outlets



schaltbares 8-fach Tap
switchable 8-way-Tap

